

▶ AUCTOPUS CONFERENCE PHONE



▶ AUCTOPUS[®] Full Duplex Conference Phone



INNOTRIK AUCTOPUS Analog Conferenc Phone

The Auctopus is the ideal conference phone perfect solution, Industry-leading full duplex technology provides natural, deliver unrivaled audio clarity and room coverage for your, The Auctopus utilizes the latest voice technology to ensure a clear sound and smooth speech on each and every call, Simultaneous two-way conversation without clipping or drop-outs that are common in traditional speakerphones.

▶ Benefits

▪ Audio Performance

Full duplex sound enables participants to speak and listen at the same time no cutting in and out.

Built-in high audio quality speaker with three microphones array, while 360° microphone coverage with intelligent mixing highlights the person speaking, not the distracting ambient sounds, for crystal clear conferencing.

▪ Pickup Range

Up to 10 ft (3-meter) microphone pickup range support 20~60 square for small to midsize conference rooms that seat up to 10 participants.

▪ Resists Interference

Resists interference from mobile phones or wireless devices provide clearer calls without distracting noise

▪ Echo Cancellation

Industry-leading real full duplex, 256ms echo cancellation with high automatic gain control function,

▪ Quality Of The Materials


Standard 94V0 fire prevention materials for the shell and circuit board, 10 million times button lifetime and the backlight LCD can be operation to 50 thousands hours.

▪ Ease To Use

User-friendly telephone style controls, True plug-and-play capability.

▪ Install

Connects into any analog phone jack and can be connect to a PBX with an analog extension

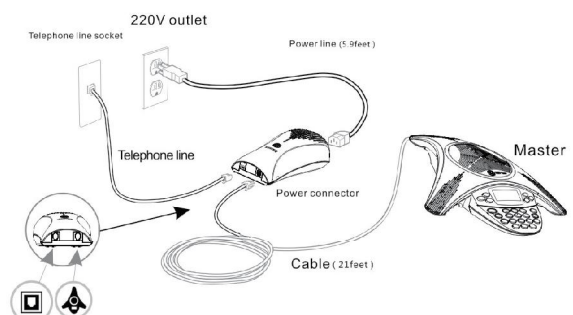




► **Auctopus S1**

- Business-quality conferencing phone making conference calls more productive
- 3 meter pickup range, Suitable for small and midsized conference rooms
- 360° microphone coverage
- Real full duplex

► **System Specifications**

- **Keypad**
12-key telephone keypad, On-hook/off-hook, redial, conference, mute, volume up/down keys, menu, hold, navigation keys, speed dial
- **Display**
128x64 pixel backlit graphical LCD
- **Telephone Connection**
Analog PBX or PSTN line RJ-11C, -12 dBm nominal
- **Loudspeaker**
Volume: adjustable to 94 dBA SPL
Bandwidth: 300 Hz–3.4 kHz
Volume at 0.5 meters
Automatic level controls keep participants audio balanced and consistent
- **Console microphones**
3 Cardioid microphones 300 to 3500 Hz
- **Power**
Auto-adjusting power module:
AC 100V-220V, 50/60 Hz
- **Weight**
Phone unit: 2.2kg
Power supply: .0.96kg
Shipping: 3.4kg
- **Dimensions (W x D x H)**
Phone size: 38 x 34 x 7.8 cm
Package size: 39.5 x 33.5 x 16 cm
- **Environmental**
Operating temperature: 0 - 40° C
Operating humidity: 20 to 85%

- **Echo Cancellation**
Tail time: 256 ms x 3
- **Noise Cancellation**
Dynamic noise cancellation
- **Audio**
Up to 3m (10ft) microphone pickup range
Gated microphone with intelligent microphone mixing
Dynamic noise reduction
- **Noise Level:** < 48 dBa
- **Certifications & Standards**
FCC :part 68, 15 Class B ,
CE Mark (R & TTE Directive) , RoHS
- **Phone Book**
Quick dialing :1 digit
Name :18 characters
Speed dialling: 32 digits (10 entries)
- **Other**
Fire prevention: Standard 94V0
Button lifetime: 10 million times
Backlight LCD lifetime: 50,000 hours
- **AUCTOPUS ships with**
6.4m (21 ft) Cat. 5 cable :1
2.1m (7 ft) Telephone cable (RJ-11) :1
Quick start guide :1
Tabletop phone console :1
- **Power Supply Kit**
Power supply unit (PSTN RJ-11 port) :1
- **USB Expansion Kit (Optional)**
Power supply unit with USB port :1
1.8m (5.9 ft) USB Cable :1
(without PSTN port)

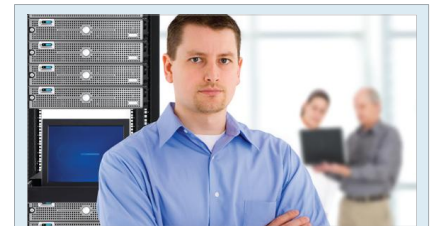

This publication is intended for reference purposes only. All product specifications are subject to change without notice. No part of this publication may be reproduced in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission of AOS.

All brand names and product names are trademarks or registered trademarks of their respective companies.

